



KILLARK®



Sealing Fittings typically not required,
reducing installation time and cost



- Factory Sealed Universal Contact Blocks
- LED Pilot Light Devices as Standard
- No 'Seal Plate' Allows for Direct Wiring
- Explosion-Proof and NEMA 3 Weatherproof
- Available for Class I, Group B Applications

SEAL-XM™

FACTORY SEALED CONTROLS





Class I, Div. 1&2, Groups B*,C,D
Class I, Zone 1&2, Groups IIB, IIA
Class II, Div. 1&2, Groups E,F,G
Class III
NEMA 3, 7(C,D) 9(E,F,G)

 Certified File 2493125

Contact Factory for other certification details

FEATURES-SPECIFICATIONS

SEAL-XM™

Applications

Seal-XM™ Factory Sealed push button stations, selector switches, pilot lights and tumbler switches are used to prevent the igniting of external hazardous atmospheres by the enclosed arcing devices in such areas as:

- Hazardous locations due to the presence of flammable gases or vapors, combustible dusts or easily ignitable fibers or flyings
- Installations at petroleum refineries, chemical and petrochemical plants and other processing or storage facilities where similar hazards exist
- Use in conjunction with magnetic starters or contactors for remote control of motors

Features

- Incorporates Factory Sealed Universal contact blocks and GOB3 LED pilot light devices
- External sealing fittings typically not required, reducing installation time and cost
- No seal plate between the electrical device and back box allows direct wiring to contact terminals
- NEMA 3 weatherproof
- Grounding boss supplied in the splice box
- Sold as complete units 1/2" , 3/4" Dead End and thru feed. 1" hubs available on request
- Standard finish is a grey epoxy powder baked on for ultimate corrosion resistance
- More wiring room in back box



Material & Groups

FXCS-*-M Groups C, D
Copper free aluminum cover & box
FXCS-*-MB Groups B, C, D
Copper free aluminum cover & box
FXCS-*-MBI Groups B, C, D
Copper free aluminum cover & ductile iron back box zinc electroplated
FXCS-*-MI Groups C, D
Copper free aluminum cover & ductile iron back box zinc electroplated

Stainless steel captive cover screws

Operating shafts stainless steel

*Group "B" (-MB & -MBI) versions need not be sealed within first 60" of conduit. Sealing fitting required beyond 60"

		Factory Sealed Contact Block
Contact Block Ratings		
Catalog Number	Diagram	
FXCS-*-M		
FXCS-*-MB		
FXCS-*-MBI		
FXCS-*-MI		

Hazardous Rating:


Class I, Division 2, Groups A,B,C,D Class I, Zone 2, Groups IIB+H2, IIA, T6

Terminal Capacity:

22 thru 12 AWG [0.52-2.5mm²] copper, solid or stranded conductors. Tightening torque: 7 in-lbs. (tolerance +3.0/0.0) [~0.8Nm]

Contact Electrical Ratings:

NEMA A600- 7200 VA (Make), 720 VA (Break), 10 Amps Cont. @600V AC (Thermal)
NEMA Q300-69 VA (Make & Break), 2.5 Amps Cont. @250V DC (Thermal)

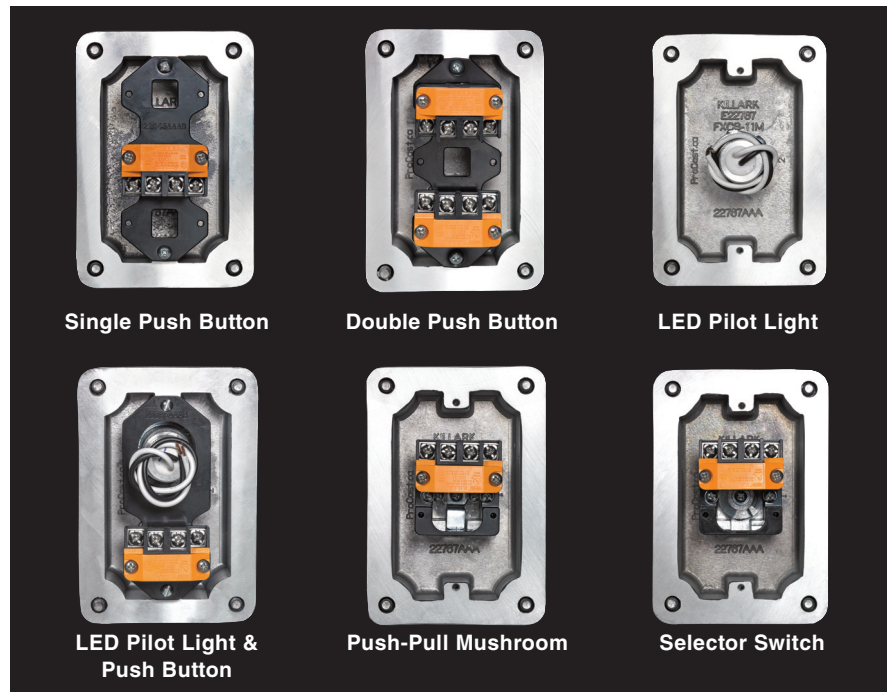



Single Push Button



Double Push Button



LED Pilot Light

Class I, Div. 1&2, Groups B*,C,D
 Class I, Zone 1&2, Groups IIB, IIA
 Class II, Div. 1&2, Groups E,F,G
 Class III
 NEMA 3, 7(C,D) 9(E,F,G)

Certified File 2493125

FEATURES-SPECIFICATIONS

SEAL-XM MOMENTARY CONTACT SINGLE PUSH BUTTON						
CATALOG NUMBER		HUB SIZE	DIAGRAM	BUTTON COLOR	LEGEND PLATE MARKING ^②	
BOX COVER ^①						
DEAD-END	FEED-THRU					
FXCS-1B1-M	FXCS-4B1-M	1/2"		Green	Start	
FXCS-2B1-M	FXCS-5B1-M	3/4"				
FXCS-1B2-M	FXCS-4B2-M	1/2"		Red	Stop	
FXCS-2B2-M	FXCS-5B2-M	3/4"				
FXCS-1B3-M	FXCS-4B3-M	1/2"		Black	Specify	
FXCS-2B3-M	FXCS-5B3-M	3/4"				

SEAL-XM MOMENTARY CONTACT DOUBLE PUSH BUTTON						
CATALOG NUMBER		HUB SIZE	DIAGRAM	BUTTON COLOR	LEGEND PLATE MARKING ^②	
BOX & COVER ^①						
DEAD-END	FEED-THRU					
FXCS-1B4-M	FXCS-4B4-M	1/2"		Green/Red	Start/Stop	
FXCS-2B4-M	FXCS-5B4-M	3/4"				
FXCS-1B5-M	FXCS-4B5-M	1/2"		Green/Green	Specify	
FXCS-2B5-M	FXCS-5B5-M	3/4"				
FXCS-1B7-M	FXCS-4B7-M	1/2"		Black/Black	Specify	
FXCS-2B7-M	FXCS-5B7-M	3/4"				

SEAL-XM LED PILOT LIGHT						
CATALOG NUMBER		HUB SIZE	DIAGRAM	VOLT	LENS COLOR	LEGEND PLATE MARKING ^②
BOX & COVER ^①						
DEAD-END	FEED-THRU					
FXCS-1B24CL-M	FXCS-4B24CL-M	1/2"		120V	Clear	Specify
FXCS-2B24CL-M	FXCS-5B24CL-M	3/4"				
FXCS-1B24GL-M	FXCS-4B24GL-M	1/2"		120V	Green	Specify
FXCS-2B24GL-M	FXCS-5B24GL-M	3/4"				
FXCS-1B24RL-M	FXCS-4B24RL-M	1/2"		120V	Red	Specify
FXCS-2B24RL-M	FXCS-5B24RL-M	3/4"				

① Replace -M with -MB for Group "B" Rating, -MI for Iron Back Box, -MBI for Group "B" and Iron Back Box.

② For other than standard legend plate markings refer to 'Custom Legend Plates' on page 5.

* Group "B" (-MB & -MBI) versions need not be sealed within first 60" of conduit. Sealing fittings required beyond 60".